

CAT-6 Outdoor-Indoor Cable

Application

Network and voice application in a standard cabling system, including IEEE802.3 1000 Base-T, 100 Base-Tx, 10 Base-T, 1000 Base-Tx (ANSI/TIA/EIA-854-2001), 155Mb/s ATM, 4/16 Mb/s Token ring etc.

Features


- ▶ Tape design engineered for smaller overall diameter and ease of installation
- ▶ Characterized and tested to 250MHz
- ▶ Positive PSACR up to 300MHz for future bandwidth requirements
- ▶ Every master reel is tested to ensure electrical performance compliance
- ▶ RoHs compliant

Physical Specifications

Conductor Size & Material Type	23 AWG Solid Bare Copper
Insulation Material Type Thickness	PE 18 mm
No. of Pair / Coverage Type	4 / Jel Filled (Flooded)
Cable Jacket Type Thickness	PE 0.55 mm
Cable Colour Dimension	Black 7.1 mm

Pair Identification

Pair 1	Blue/White-Blue
Pair 2	Orange/White-Orange
Pair 3	Green/White-Green
Pair 4	Brown/White-Brown

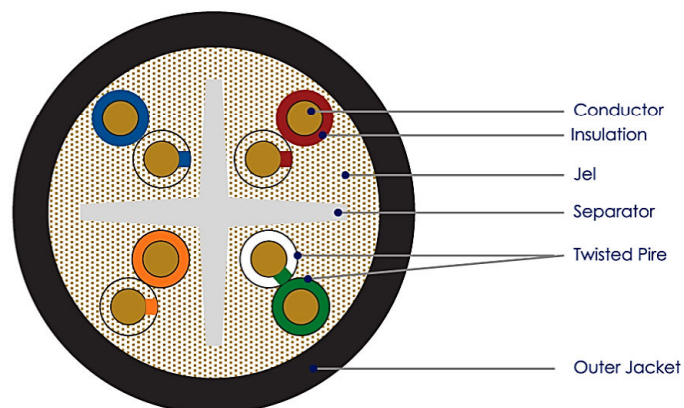

CAT-6 OUTDOOR-INDOOR CABLE

Temperature Range

During Installation	-10°C up to +70°C
During Operating	-10°C up to +70°C

CAT-6 Outdoor-Indoor Cable

Electrical Specifications

Capacitance unbalance (max.) @ 0.8 or 1 kHz (pF/km)	1600										
DC Resistance (max.) Ω /km @ 20°C	95										
Resistance unbalance within a pair (max.) (%)	2										
Resistance unbalance between pairs (max.) (%)	4										
Delay Skew (max.) ns/100m @ 20°C	45										
Mean Input impedance @ 100 MHz	100 \pm 5 Ω										
Dielectric strength	<table border="0"> <tr> <td>Min</td> <td>Min</td> </tr> <tr> <td>1.0 kVdc</td> <td>2.5 kVdc</td> </tr> <tr> <td>or</td> <td>or</td> </tr> <tr> <td>0.7 kVac</td> <td>1.7 kVac</td> </tr> <tr> <td>for 1 min.</td> <td>for 2 secs.</td> </tr> </table>	Min	Min	1.0 kVdc	2.5 kVdc	or	or	0.7 kVac	1.7 kVac	for 1 min.	for 2 secs.
Min	Min										
1.0 kVdc	2.5 kVdc										
or	or										
0.7 kVac	1.7 kVac										
for 1 min.	for 2 secs.										

IEC 61156-5 ed2.0 Category 6 cable parameters

Freq. MHz	Ins. Loss (dB/100m)	RL (dB)	Pair to Pair		Power Sum		Po. Delay (ns/100)
			NEXT	ELFEXT	NEXT	ELFEXT	
			(dB/100m)		(dB/100m)		
	Max.	Min.	Min.	Min.	Min.	Min.	Max.
10	6.0	25	60.3	48.0	57.3	45.0	545.4
16	7.6	25	57.2	43.9	54.2	40.9	543.0
20	8.5	25	55.8	42.0	52.8	39.0	542.0
31.25	10.7	25	52.9	38.1	49.9	35.1	540.4
62.5	15.5	23.6	48.4	32.1	45.4	29.1	538.6
100	19.9	20.1	45.3	38.0	42.3	25.0	537.6
200	29.1	18	40.8	28.0	37.8	19.0	536.5
250	33.0	17.3	39.3	20.0	36.3	17.0	536.3

Standard Compliances

- ISO/IEC 11801:2011 (Ed. 2.2)
- EN 50173-1:2011
- EN 50288-3-1:2013
- IEC 61156-5:2012 (Ed. 2.1)
- EN 50173-2:2007
- ANSI/TIA-568-C.2:2009

Order Information

Part No	No. of Pairs	Type of Cable	Size of Conductor	Overall Dia. mm	Type of Jacket	Standard Length
CS-C6PJ4	4	Floded/UTP	23AWG	7.1	PE	305M/Box - 500M/Reel
CS-C6PF4	4	Floded/F-UTP	23AWG	7.6	PE	305M/Box - 500M/Reel